

Lecture 4

HELSINGIN YLIOPISTO
HELSINGFORS UNIVERSITET
UNIVERSITY OF HELSINKI

Memory Management (*Muistinhallinta*)

Ch 8.3-8.6 [Sta10]
(Virtual) Memory management
Hardware and software support
Example: Pentium & ARM

Teemu's Cheesecake

Register, on-chip cache, memory, disk, and tape speeds relative to times locating cheese for the cheesecake you are baking...

hand	table	refrigerator	moon	Europa (Jupiter)
0.5 sec (register)	1 sec (cache)	10 sec (memory)	12 days (disk)	4 years (tape)

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 2

Virtual Memory (*virtuaalimisti*)

- Problem: How can I make my (main) memory as big as my disk drive?
- Answer: Virtual memory
 - keep only most probably referenced data in memory, and rest of it in disk
 - disk is much bigger and slower than memory
 - address in machine instruction may be different than memory address
 - need to have efficient address mapping
 - most of references are for data in memory
 - joint solution with HW & SW

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 3

Other Problems Often Solved with VM

- If you want to have many processes in memory at the same time, how do you keep track of memory usage?
- How do you prevent one process from touching another process' memory areas?
- What if a process needs more memory than physically available?

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 4

Memory Management Problem

- How much memory for each process?
 - Is it fixed amount during the process run time or can it vary during the run time?
- Where should that memory be?
 - In a continuous or discontinuous area?
 - Is the location the same during the run time or can it vary dynamically during the run time?
- How is that memory managed?
- How is that memory referenced?

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 5

Partitioning

- How much physical memory for each process?
- Static (fixed) partitioning (*kiinteät partiot, kiinteä ositus*)
 - Amount of physical memory determined at process creation time
 - Continuous memory allocation for partition
- Dynamic partitioning (*dynaamiset partiot*)
 - Amount of physical memory given to a process varies in time
 - Due to process requirements (of this process)
 - Due to system (i.e., other processes) requirements

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 6

Static Partitioning

- Equal size - give everybody the same amount
 - Fixed size - big enough for everybody
 - too much for most
 - Need more? Can not run!
- Unequal size
 - sizes predetermined
 - Can not combine
- Variable size
 - Size determined at process creation time

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 7

Dynamic Partitioning

- Process must be able to run with varying amounts of main memory
 - all of memory space is not in physical memory
 - need some minimum amount of memory
- New process?
 - If necessary reduce amount of memory for some (lower priority) processes
- Not enough memory for some process?
 - reduce amount of memory for some (lower priority) processes
 - kick (**swap**) out some (lower priority) process

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 8

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 9

Fragmentation (*pirstoutuminen*)

- Internal fragmentation (*sisäinen pirstoutuminen*)
 - unused memory inside allocated block
 - e.g., equal size fixed memory partitions
- External fragmentation (*ulkoinen pirstoutuminen*)
 - enough free memory, but it is splintered as many un-allocatable blocks
 - e.g., unequal size partitions or dynamic fixed size (variable size) memory partitions

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 10

Address Mapping (*osoitteen muunnos*)

Pascal, Java: `while (...)`
`X := Y+Z;`

Symbolic Assembly Language:
`loop: LOAD R1, Y`
`ADD R1, Z`
`STORE R1, X`

(Textual) machine language:
`1312: LOAD R1, 2510`
`ADD R1, 2514`
`STORE R1, 2600`
 (addresses relative to 0)

Execution time:
`101312: LOAD R1, 102510`
`ADD R1, 102514`
`ADD R1, 102600`
 (real, physical memory addresses)

compiler, program load time, or program run time

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 11

Address Mapping

Textual machine language: logical address
`1312: LOAD R1, 2510`

Execution time:
`101312: LOAD R1, 102510` or
`101312: LOAD R1, 2510`

physical address (constant?) logical addr

- Want: $R1 \leftarrow \text{Mem}[102510]$ or $\text{Mem}[2510]$?
 - Who makes the mapping? When?

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 12

Address Mapping, address translation

- At program load time
 - Loader (*lataaja*)
 - Static address binding (*staattinen osoitteiden sidonta*)
- At program execution time
 - CPU
 - With every instruction
 - Dynamic address binding (*dynaaminen osoitteiden sidonta*)
 - Swapping (*heittovaihto*)
 - Virtual memory

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 13

Virtual Memory Implementation

- Methods
 - Base and limit registers (*kanta- ja rajarekisterit*)
 - Segmentation (*segmentointi*)
 - Paging (*sivutus*)
 - Segmented paging, multilevel paging
- Hardware support
 - MMU - Memory Management Unit
 - Part of processor
 - Varies with different methods
 - Sets limits on what types of virtual memory (methods) can be implemented using this HW

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 14

Base and Limit Registers

- Continuous memory partitions
 - One or more (4?) per process
 - May have separate base and limit registers
 - Code, data, shared data, etc
 - By default, or given explicitly in each mem. ref.
- BASE and LIMIT registers in MMU
 - All addresses logical in machine instructions
 - Exec. time address mapping for address (x):
 - Check: $0 \leq x < \text{LIMIT}$
 - Physical address: $\text{BASE} + x$

see Comp. Org I

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 15

Virtual memory

- Only needed reserved areas (chunks) in the memory, no need to be contiguous
 - Demand paging (*tarvenotto*)
- Chunk size?
 - Fixed size = Paging
 - Variable size = Segmentation
 - Combined = Paged segments, multilevel paging
- OS bookkeeping (*KJ kirjanpito*)
 - Page frame table (*sivutilautilu, sivukehystautilu*)
 - Which page frames are free, which are occupied
 - Each process has its own page table (*sivutaulu*)
 - Is this page in memory or on disk? -- "presence-bit"
 - In memory, which page frame contains this page?
 - Other control? Bits: Modified, Referenced

OS course content

Paging "most common" => here only paging

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 16

Virtual Memory: Paging (*sivutus*)

Program: pages

Memory: frames

Process A in main memory

OS loads process A from disk

(Sta10 Fig 8.15)

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 17

Address Mapping with Paging VM (*Sivuttavan virtuaalimuistin osoitteenmuunnos*)

Main Memory



Page 1 of A (13)
Page 2 of A (14)
Page 3 of A (15)
Page 0 of A (18)

Process A Page Table


Logical Address: 1, 30
Physical Address: 18, 13

(Sta10 Fig 8.16)


Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 18

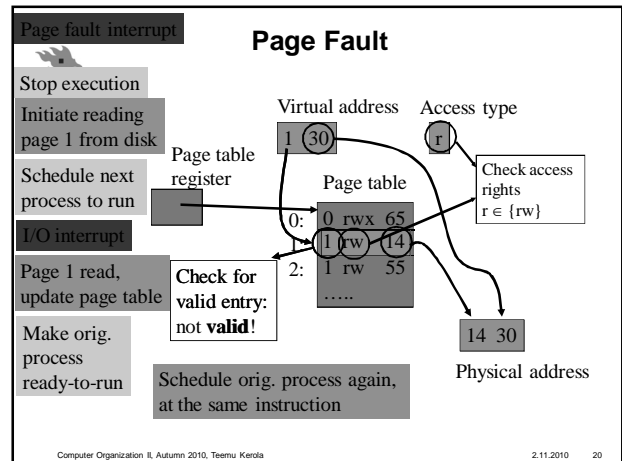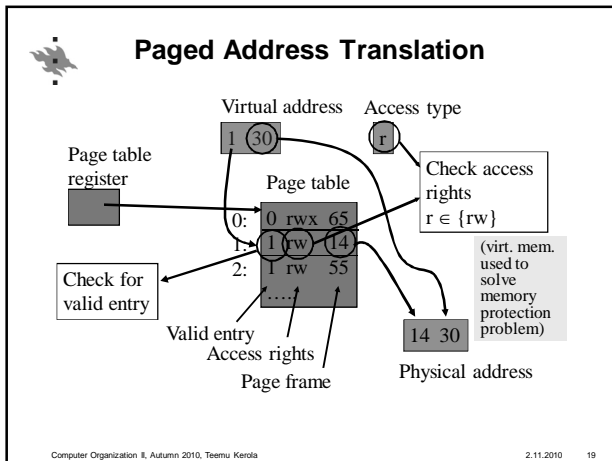

- ### Virtual memory: Translation Lookaside Buffer (TLB) (osoitteennuunnospuskuri)
- Address translation for each memory reference, at least once for each instruction
 - Page table elements in memory = extra memory access?
 - Too slow!
 - Solution
 - Principle of locality! Page table element referenced soon again
 - Store recently used page table elements (of this process) in TLB on CPU's memory management unit
 - TLB, translation lookaside buffer
 - Just like cache
 - Fast set of registers (Pentium: 32 registers)
 - Associative search
 - Hit ratio (Osumatodennäköisyys) 99.9%? (Almost always!)
- Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 21

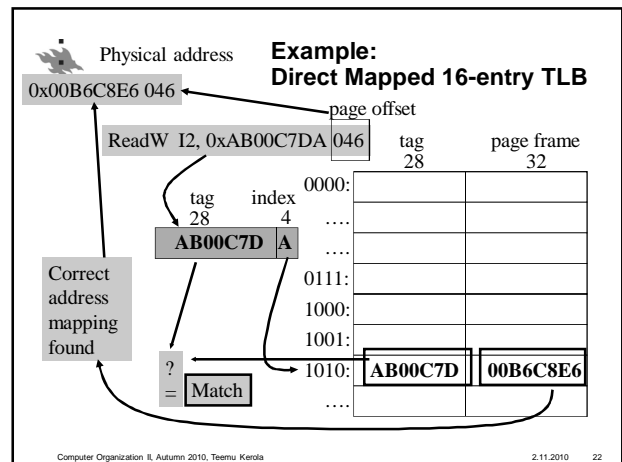



- ### Translation Lookaside Buffer (TLB)
- "Hit" on TLB?
 - address translation is in TLB - real fast
 - "Miss" on TLB?
 - must read page table entry from memory
 - takes time – not much, just a memory reference
 - Entry might be in cache!
 - cpu waits idle until it is done
 - Just like normal cache, but for address mapping
 - implemented just like cache
 - instead of cache line data have physical address
 - split TLB? 1 or 2 levels?
- Discussion?
- Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 23

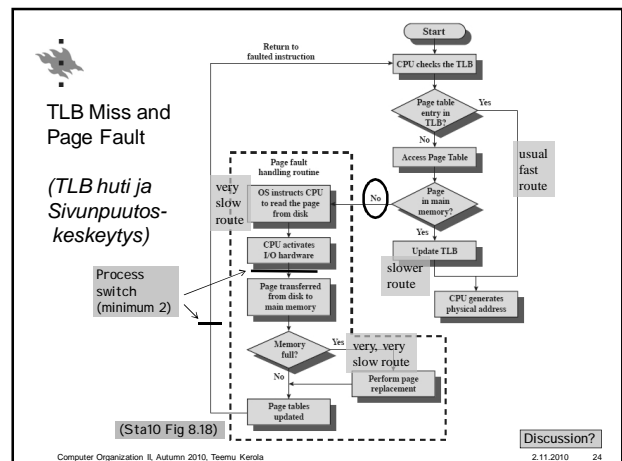

Virtual Memory Support Ops

- Hardware support: MMU and its special registers
 - PTR (page table register)
 - Physical start address of process page table (copied from PCB – process control block)
 - TLB (translation lookaside buffer)
 - Caches page table entries from earlier address mappings
 - "Page fault" – interrupt
 - Updating reference and modified bits
- Process switch
 - PTR register ← Physical start address of process page table
 - Invalidate old TLB content (it is usually process specific)
 - Each location has valid bit
 - Changed elements back to memory ("cache block")

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 25

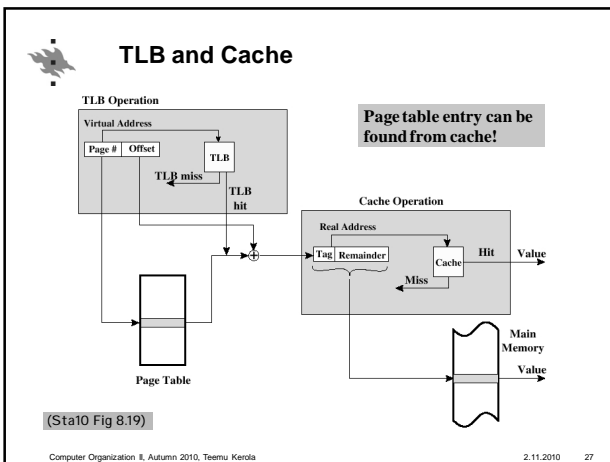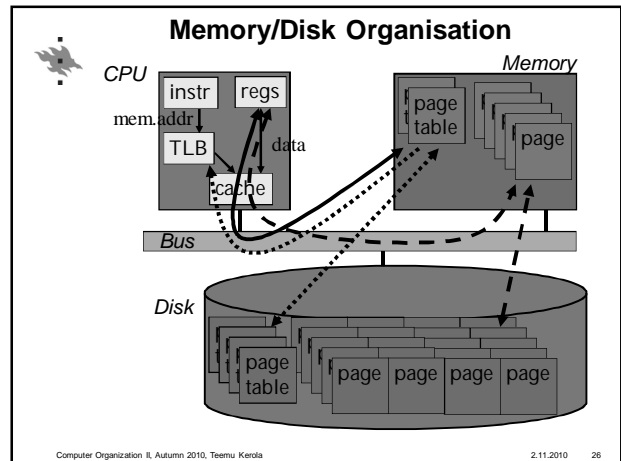

TLB vs. Cache

TLB Miss

- CPU waits idling
- HW implementation
- Invisible to process
- Data is copied from memory to TLB
 - from page table data
 - from cache?
- Delay 4 (or 2 or 8?) clock cycles

Cache Miss

- CPU waits idling
- HW implementation
- Invisible to process
- Data is copied from memory to cache
 - from page data
- Delay 4 (or 2 or 8?) clock cycles

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 28

TLB Misses vs. Page Faults


TLB Miss

- CPU waits idling
- HW implementation
- Data is copied from memory to TLB (or from cache)
- Delay 1-8 (?) clock cycles

Page Fault

- Process is suspended and cpu executes some other processes
- SW implementation
- Data is copied from disk to memory
- Delay 10-30 ms(?)

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 29

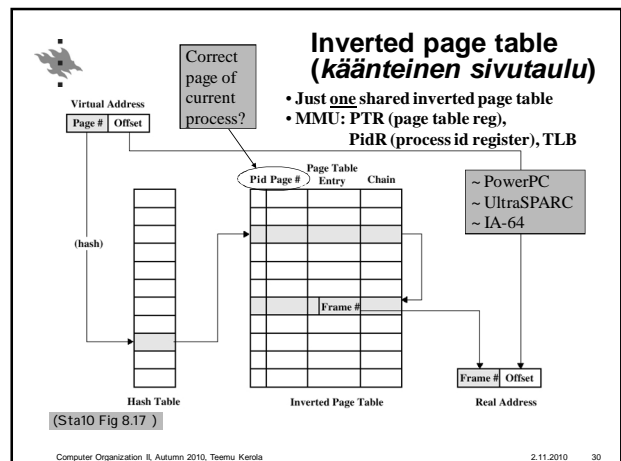

Hierarchical page table (monitasoinen sivutaulu)

- Several systems allow large virtual address space
 - Page table split to pages, some of it on the disk
 - Top level of page table fits to one page, always in memory

4-kbyte root page table (page table directory) 1 K items (= $1024 = 2^{10}$)

32b osoite
Dir 10 Page 10 Offset 12

4-Mbyte user page table (in virtual memory) 1K * 1K = 1M items

4-Mbyte user address space (Sta09 - OS Fig 8.4)

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 31

Virtual Memory Policies

- Fetch policy (noutopolitiikka)
 - demand paging: fetch page only when needed 1st time
 - working set: keep all needed pages in memory
 - prefetch: guess and start fetch early
- Placement policy (sijoituspolitiikka)
 - any frame for paged VM
- Replacement policy (poistopolitiikka)
 - local, consider pages just for this process for replacement
 - global, consider also pages for all other processes
 - dirty pages must be written to disk (likaiset, muutetut sivut)

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 32

Virtual Memory Example Pentium (IA-32)

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 33

Pentium support for memory management

- Unsegmented unpaged, max $2^{32} = 4$ GB
 - Virtual address = physical address
 - Efficient \Rightarrow feasible in real-time systems
- Unsegmented paged (Sivuttava), max 4 GB
 - Linear address space (lineaarinen osoiteavaruus)
 - Page and frame size: 4KB or 4MB
 - Protection frame based
- Segmented unpaged (Segmentoiva), max $2^{48} = 64$ TB
 - Several segments \Rightarrow several linear memory spaces
 - Protection segment based
- Segmented paged (Sivuttava segmentointi), max 64 TB
 - Memory management using pages and page frames
 - Protection segment based

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 34

Pentium: Address Translation

Logical Address
Segment 16 Offset 32

Linear Address
Dir 10 Page 10 Offset 12

Physical Address

Segmentation: Base, Segment Table

Paging: Page Directory, Page Table

Main Memory

(Sta10 Fig 8.21)

- If *Paging=Enabled*, use page tables else linear address = physical address (e.g., OS Device drivers?)
- Control registers (see further in the text book)

Discussion?

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 35

Pentium: Segment Descriptor (segmenttikuvaaja)

Segment Descriptor (Segment Table Entry)

- Base**
Defines the starting address of the segment within the 4-GByte linear address space.
- D/B bit**
In a code segment, this is the D bit and indicates whether operands and addressing modes are 16 or 32 bits.
- Descriptor Privilege Level (DPL)**
Specifies the privilege level of the segment referred to by this segment descriptor.
- Granularity bit (G)**
Indicates whether the Limit field is to be interpreted in units by one byte or 4 KBytes.
- Limit**
Defines the size of the segment. The processor interprets the limit field in one of two ways, depending on the granularity bit: in units of one byte, up to a segment size limit of 1 MByte, or in units of 4 KBytes, up to a segment size limit of 4 GBytes.
- S bit**
Determines whether a given segment is a system segment or a code or data segment.
- Segment Present bit (P)**
Used for nonpaged systems. It indicates whether the segment is present in main memory. For paged systems, this bit is always set to 1.
- Type**
Distinguishes between various kinds of segments and indicates the access attributes.

(Sta10 Table 8.5)

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 36

Pentium: Page Table (sivutaulu)

Page Directory Entry and Page Table Entry

Accessed bit (A)
This bit is set to 1 by the processor in both levels of page tables when a read or write operation to the corresponding page occurs.

Dirty bit (D)
This bit is set to 1 by the processor when a write operation to the corresponding page occurs.

Page Frame Address
Provides the physical address of the page in memory if the present bit is set. Since page frames are aligned on 4K boundaries, the bottom 12 bits are 0, and only the top 20 bits are included in the entry. In a page directory, the address is that of a page table.

Page Cache Disable bit (PCD)
Indicates whether data from page may be cached. (Sta10 Table 8.5)

Page Size bit (PS)
Indicates whether page size is 4 KByte or 4 MByte.

Page Write Through bit (PWT)
Indicates whether write-through or write-back caching policy will be used for data in the corresponding page.

Present bit (P)
Indicates whether the page table or page is in main memory.





Read/Write bit (RW)
For user-level pages, indicates whether the page is read-only access or read/write access for user-level programs.

User/Supervisor bit (US)
Indicates whether the page is available only to the operating system (supervisor level) or is available to both operating system and applications (user level).

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 37

Virtual Memory Example ARM

Computer Organization II, Autumn 2010, Teemu Kerola 2.11.2010 38

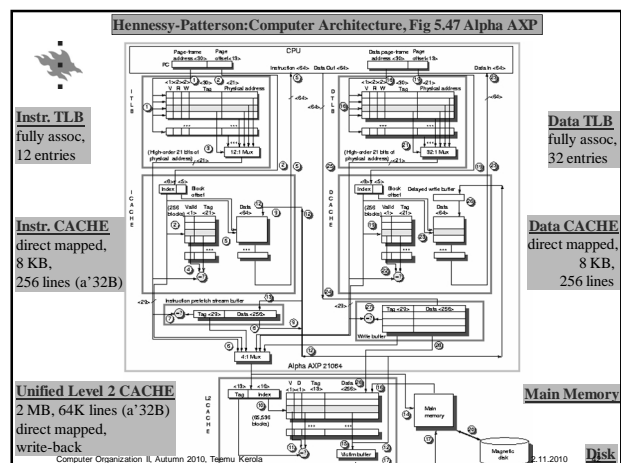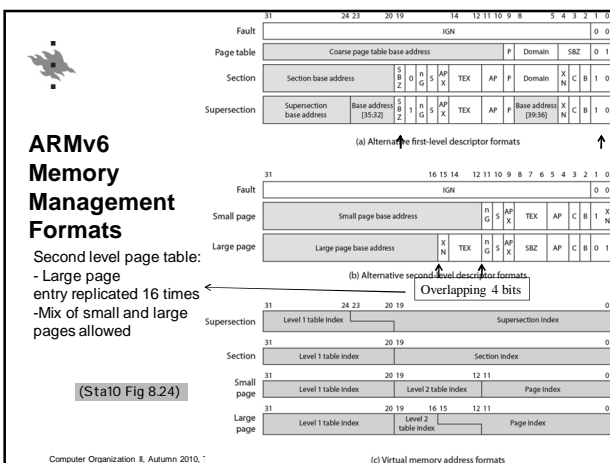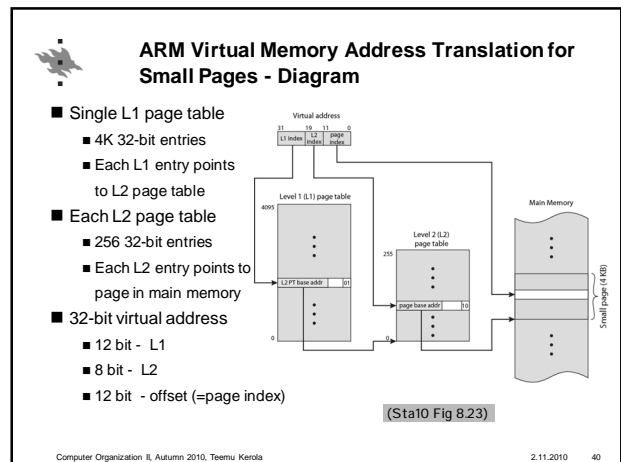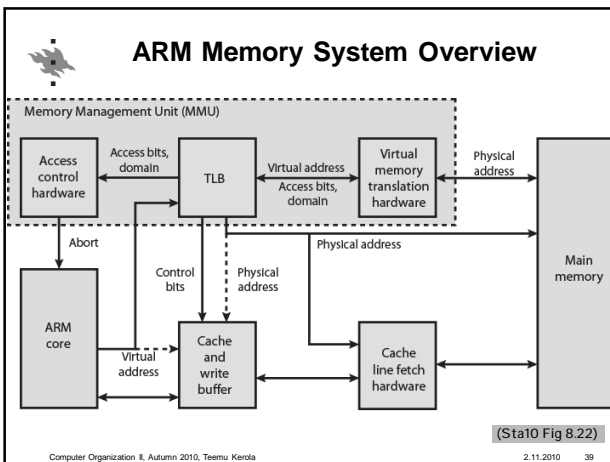



Virtual Memory Summary

- How to partition physical memory for processes?
 - Fixed partitions (various methods)
 - Dynamic partitions: segments, pages
- Paged virtual memory
 - Multilevel page tables
- How to translate addresses?
 - TBL, multi-level TLB
- How does TBL work with cache?
- Examples: Intel & ARM

Computer Organization II, Autumn 2010, Teemu Kerola

2.11.2010 43



Review Questions

- What hardware support is needed for virtual memory implementation?
- Differences of paging and segmentation?
- Why to combine paging and segmentation?
- Relationship of TLB and cache?
 - similarities, differences?

Computer Organization II, Autumn 2010, Teemu Kerola

2.11.2010 44