

Hardwired Control Unit

Ch 16

Micro-operations
Controlling Execution
Hardwired Control

11.10.2002

Copyright Teemu Kerola 2002

1

What is Control ⁽²⁾

- So far, we have shown what happens inside CPU
 - execution of instructions
 - opcodes, addressing modes, registers
 - I/O & memory interface, interrupts
- Now, we show how CPU controls these things that happen
 - how to control what gate or circuit should do at any given time
 - control wires transmit control signals
 - control unit decides values for those signals

11.10.2002

Copyright Teemu Kerola 2002

2

Micro-operations ⁽²⁾

(mikro-operaatio)

- Basic operations on which more complex instructions are built Fig. 16.1 (Fig. 14.1 [Stal99])
 - each execution phase (e.g., fetch) consists of one or more sequential micro-ops
 - each micro-op executed in one clock cycle in some subsection of the processor circuitry
 - each micro-op specifies what happens in some area of cpu circuitry
 - system cycle time determined by longest micro-op!
- Many micro-ops (for successive instructions) can be executed simultaneously
 - if non-conflicting, independent areas of circuitry

11.10.2002

Copyright Teemu Kerola 2002

3

Instruction Fetch Cycle ⁽¹⁰⁾

- 4 registers involved
 - MAR, MBR, PC, IR

Fig. 12.6

(Fig. 11.7 [Stal99])

- What happens?

Address of next instruction is in PC
 Address (MAR) is placed on address bus
 READ command given to memory
 Result (from memory) appears on data bus
 Data from data bus copied into MBR
 PC incremented by 1
 New instruction moved from MBR to IR
 MBR available for new work

micro-ops?

MAR ← (PC)
 READ

MBR ← (mem)
 PC ← (PC) + 1
 IR ← (MBR)

11.10.2002

Copyright Teemu Kerola 2002

4

Instruction Fetch Micro-ops (2)

- 4 micro-ops
 - can not change order, can do some ops at the same time
 - s2 must be done after s1
 - s3 can be done simultaneously with s2
 - s4 can be done with s3, but must be done after s2

```
s1: MAR ← (PC), READ
s2: MBR ← (mem)
s3: PC ← (PC) + 1
s4: IR ← (MBR)
```

```
t1: MAR ← (PC)
t2: MBR ← (mem)
    PC ← (PC) + 1
t3: IR ← (MBR)
```

⇒ Need 3 ticks:

assume: mem read in one cycle

implicit READ

11.10.2002

Copyright Teemu Kerola 2002

5

Micro-op Grouping (4)

- Must maintain proper sequence (semantics)
- No conflicts
 - no write to/read from with same register (set?) at the same time
 - each circuitry can be used by only one micro-op at a time
 - E.g., ALU or some bus

```
t1: MAR ← (PC)
t2: MBR ← (mem)
```

```
t2: MBR ← (mem)
t3: IR ← (MBR)
```

```
t2: PC ← (PC) + 1
t3: R1 ← (R1) + (MBR)
```

11.10.2002

Copyright Teemu Kerola 2002

6

Micro-op Types ⁽⁴⁾

- Transfer data from one reg to another
- Transfer data from reg to external area
 - memory
 - I/O
- Transfer data from external to register
- ALU or logical operation between registers


11.10.2002

Copyright Teemu Kerola 2002

7

Indirect Cycle

- Instruction contains address of an operand, instead of direct operand address

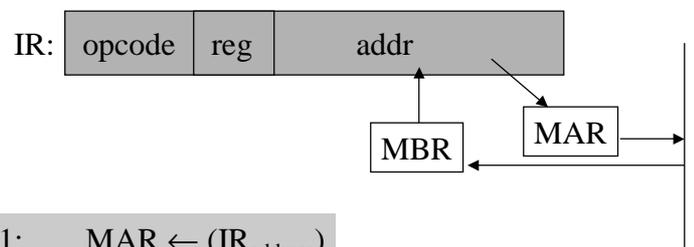

t1: $MAR \leftarrow (IR_{\text{address}})$
 t2: $MBR \leftarrow (\text{mem})$
 t3: $IR_{\text{address}} \leftarrow (MBR)$

(Replace indirect address
by direct address)

11.10.2002

Copyright Teemu Kerola 2002

8

Interrupt Cycle

- After execution cycle, test for interrupts
- If interrupt bits on, then
 - save PC to memory
 - jump to interrupt handler
 - or, find out first correct handler for this type of interrupt and then jump to that (need more micro-ops)
 - context saved by interrupt handler

```

t1: MBR ← (PC)
t2: MAR ← save-address
    PC ← routine-address
t3: mem ← (MBR)
    
```

implicit - just wait?

11.10.2002

Copyright Teemu Kerola 2002

9

Execute Cycle (4)

- Different for each op-code

```

t1: ALU1 ← (R2)
    ALU2 ← (R3)
t2: ALUout ← "+"
t3: R1 ← ALUout
    
```

```
ADD R1, X
```

```

t1: MAR ← (IRaddress)
t2: MBR ← (memory)
t3: R1 ← (R1) + (MBR)
    
```

```
ADD R1, R2, R3
```

```
t1: R1 ← (R2) + (R3)
```

```
JMP LOOP
```

```
t1: PC ← (IRaddress)
```

Was this updated in indirect cycle?

```
BZER R1, LOOP
```

```



t1: if ((R1)=0) then
    PC ← (IRaddress)
    
```

Can this be done in one cycle?

11.10.2002

Copyright Teemu Kerola 2002

10

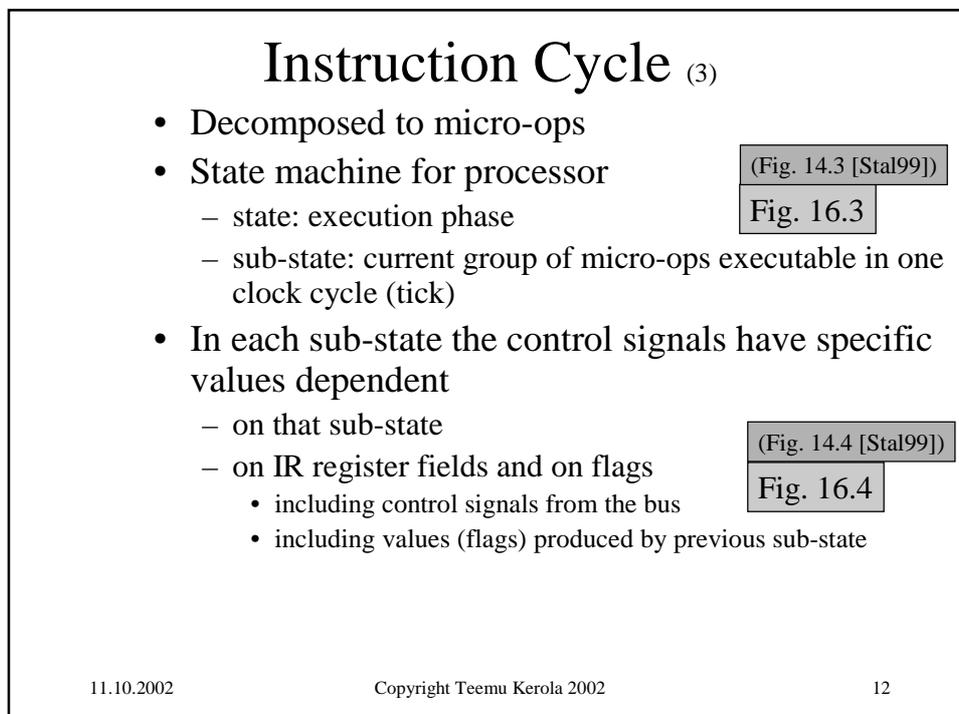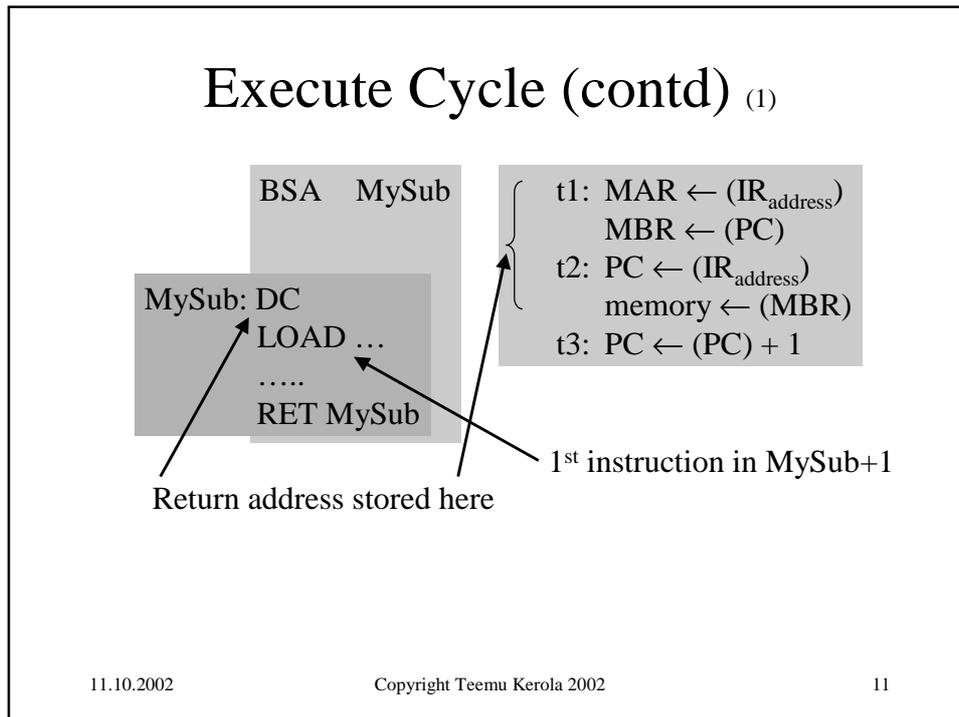

Control State Machine (2)

- Each state defines current control signal values **Control execution**
 - determines what happens in next clock cycle
- Current state and current register/flag values determine next state **Control sequencing**

11.10.2002

Copyright Teemu Kerola 2002

13

Control Signal Types (3)

- Control data flow from one register to another
- Control signals to ALU
 - ALU does also all logical ops
- Control signals to memory or I/O devices
 - via control bus

11.10.2002

Copyright Teemu Kerola 2002

14

Control Signal Example ⁽⁴⁾

- Accumulator architecture (Fig. 14.5 [Stal99])
Fig. 16.5
- Control signals for given micro-ops cause micro-ops to be executed Table 16.1
(Tbl 14.1 [Stal99])
 - setting C_2 makes value stored in PC to be copied to MAR in next clock cycle
 - C_2 controls Input Data Strobe for MAR (see Fig. A.30 for register circuit)
 - setting C_R & C_5 makes memory perform a READ and value in data bus copied to MBR in next clock cycle

11.10.2002

Copyright Teemu Kerola 2002

15

Example: Intel 8085 ⁽⁵⁾

- Introduced 1976
- 3, 5, or 6 MHz, no cache Fig. 16.7
(Fig. 14.7 [Stal99])
- 8 bit data bus, 16 bit address bus
 - multiplexed
- One 8-bit accumulator

LDA MyNumber	<table style="border-collapse: collapse; margin: 0 auto;"> <tr> <td style="border: none; padding: 0 5px;">opcode</td> <td style="border: none; padding: 0 5px;">address</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px 5px;">0x3A</td> <td style="border: 1px solid black; padding: 2px 5px;">0x10A5</td> </tr> </table>	opcode	address	0x3A	0x10A5	3 bytes
opcode	address					
0x3A	0x10A5					
OUT #2	<table style="border-collapse: collapse; margin: 0 auto;"> <tr> <td style="border: none; padding: 0 5px;">opcode</td> <td style="border: none; padding: 0 5px;">port</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px 5px;">0x2B</td> <td style="border: 1px solid black; padding: 2px 5px;">0x02</td> </tr> </table>	opcode	port	0x2B	0x02	2 bytes
opcode	port					
0x2B	0x02					

11.10.2002

Copyright Teemu Kerola 2002

16

Example: i8085 ⁽⁶⁾


- Instead of complex data path all data ^(Fig. 14.7 [Stal99]) transfers within CPU go via internal bus ^{Fig. 16.7}
 - may not be good approach for superscalar pipelined processor - bus should not be bottleneck
- External signals ^{Table 16.2} ^(Tbl 14.2 [Stal99])
- Each instruction is 1-5 machine cycles
 - one external bus access per machine cycle
- Each machine cycle is 3-5 states
- Each state is one clock cycle ^(Fig. 14.9 [Stal99])
- Example: OUT instruction ^{Fig. 16.9}

11.10.2002

Copyright Teemu Kerola 2002

17

Hardwired Control Logic Implementation ⁽³⁾

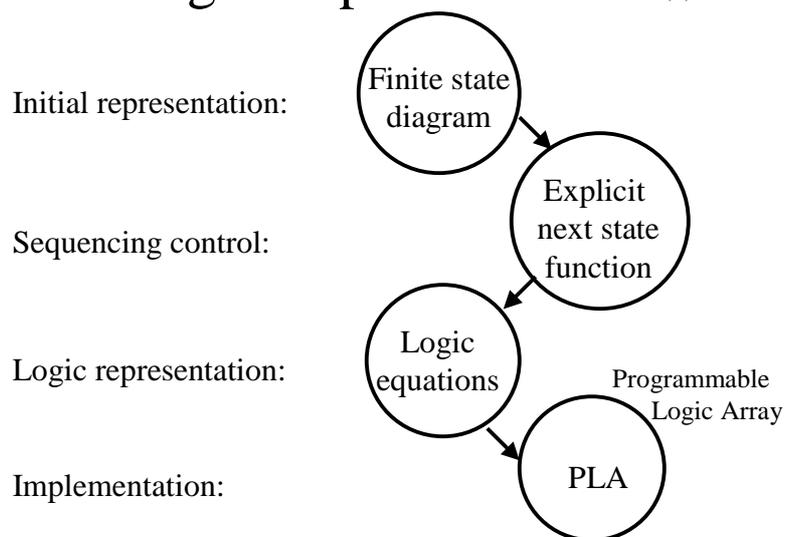

11.10.2002

Copyright Teemu Kerola 2002

18

Logic Equations (2)

Next state from current state

- State 0 -> State1
- State 1 -> S2, S6, S8, S10
- State 2 -> _____
- State 3 -> _____
- State 4 -> State 0
- State 5 -> State 0
- State 6 -> State 7
- State 7 -> State 0
- State 8 -> State 0
- State 9 -> State 0
- State 10 -> State 11
- State 11 -> State 0

Alternatively, prior state & condition

- | | |
|--|-------------|
| <u>S4, S5, S7, S8, S9, S11</u> -> State0 | |
| _____ | -> State1 |
| _____ | -> State 2 |
| _____ | -> State 3 |
| _____ | -> State 4 |
| State2 & op = SW | -> State 5 |
| _____ | -> State 6 |
| State 6 | -> State 7 |
| _____ | -> State 8 |
| State3 & op = JMP | -> State 9 |
| _____ | -> State 10 |
| State 10 | -> State 11 |

11.10.2002

Copyright Teemu Kerola 2002

21

Hardwired Control Logic (3)

- Circuitry becomes very big and complex very soon
 - may be unnecessarily slow
 - simpler is smaller, and thus faster
- Many lines (states) exactly or almost similar
- Have methods to find similar lines (states) and combine them
 - not simple
 - save space, may lose in speed
 - must be redone after any modifications


11.10.2002

Copyright Teemu Kerola 2002

22

-- End of Chapter 16: Hardwired Control --

HP 9100 Calculator (1968), 20 kg,
\$5000, 16 regs (data or 14 instructions/reg),
32Kb ROM, 2208 bit RAM magnetic core memory

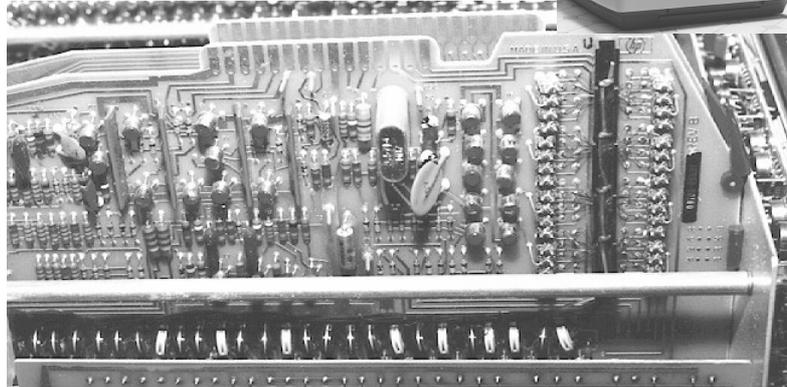

Hardwired Control Logic board <http://www.hpmuseum.org/9100cl.jpg>

11.10.2002

Copyright Teemu Kerola 2002

23